

PLAN VIEW

PROFILE



SILT FENCE MUST BE PLACED AROUND THE PERIMETER OF ALL STOCKPILES. IMMEDIATELY APPLY TEMPORARY SEEDING TO ALL STOCKPILES.

TOPSOIL STOCKPILE AREA DETAIL

EXAMPLE, NEEDS TO BE SITE SPECIFIC
CONSTRUCTION SEQUENCE AND CONTROL MEASURES

THE CONSTRUCTION OF THE PROPOSED DWELLING WILL BE UTILIZING THE FOLLOWING EROSION & SEDIMENTATION CONTROL MEASURES PRACTICES DURING CONSTRUCTION:

- 1) INSTALLATION OF A TEMPORARY CONSTRUCTION ENTRANCE TIRE CLEANING AREA, IN THE LOCATION TO BECOME THE PERMANENT DRIVEWAY.
- 2) INSTALL SILT FENCING DOWNSLOPE OF FOUNDATION EXCAVATION, TOPSOIL STORAGE AREA, AND PROPOSED SEWAGE SYSTEM.
- 3) STRIP AND STOCKPILE TOPSOIL FROM DRIVEWAY AND HOUSE CONSTRUCTION AREA. INSTALL STONE BALLAST BASE IN PERMANENT DRIVEWAY.
- 4) COMPLETE FOUNDATION CONSTRUCTION AND BACK FILL. PROVIDE POSITIVE DRAINAGE AWAY FROM BUILDING TO EXISTING DRAINAGE PATTERNS.
- 5) COMPLETE BUILDING AND ROOF DRAIN SEEPAGE CONSTRUCTION, CONNECT PIPES TO DOWNSPOUT AND RE-SPREAD TOPSOIL.
- 6) SEED ALL DISTURBED AREAS IMMEDIATELY AFTER EARTH DISTURBANCE ACTIVITIES HAVE CEASED.
- 7) MAINTENANCE SHALL CONSIST OF DAILY INSPECTION OF ALL CONTROL MEASURES. WHEN TEMPORARY SEEDINGS ARE NOT SUCCESSFUL, THE AREA SHALL BE RESEEDED. OTHER MULCH MATERIALS MAY ALSO BE USED TO ACHIEVE STABILIZATION.
- 8) AFTER ESTABLISHMENT OF PERMANENT GROUND COVER, SILT FENCING MAY BE REMOVED UPON APPROVAL FROM THE BUCKS COUNTY CONSERVATION DISTRICT AND TOWNSHIP.

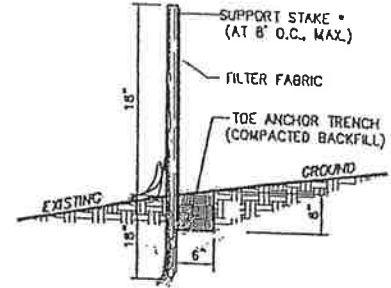

STANDARD SILT FENCE DETAIL
NOT TO SCALE

* STAKE SPACED @ 8' MAXIMUM. USE 2" x 2" WOOD OR EQUIVALENT STEEL STAKE. FILTER FABRIC FENCE MUST BE PLACED AT LEVEL EXISTING GRADE. BOTH END OF THE BARRIER MUST BE EXTENDED AT LEAST 8 FEET UP SLOPE AT 45 TO 1 MAIN BARRIER ALIGNMENT.

SEDIMENT MUST BE REMOVED WHEN ACCUMULATIONS REACH 1/2 THE ABOVE GROUND HEIGHT OF THE FENCE.

ANY SECTION OF FILTER FABRIC FENCE WHICH HAS BEEN UNDERMINED OR TOP SOILED MUST BE IMMEDIATELY REPLACED WITH A ROCK FILTER OUTLET.


PENNSYLVANIA ONE CALL SYSTEM, INC.

825 York Blvd
West Grove, Pennsylvania
15372-1078




BEFORE YOU DO ANYWHERE IN PENNSYLVANIA CALL 1-800-242-1776
NON-MEMBERS MUST BE CONTACTED DIRECTLY
PA LAW REQUIRES THREE WORKING DAYS NOTICE TO UTILITIES BEFORE YOU EXCAVATE.
SHRILL BLAST OF POWERLINE

SERIAL No. _____

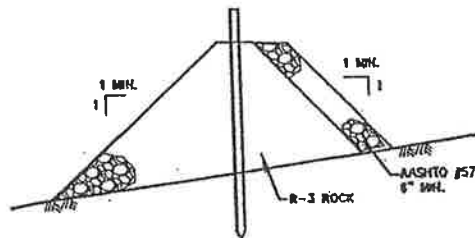


OUTLET CROSS SECTION

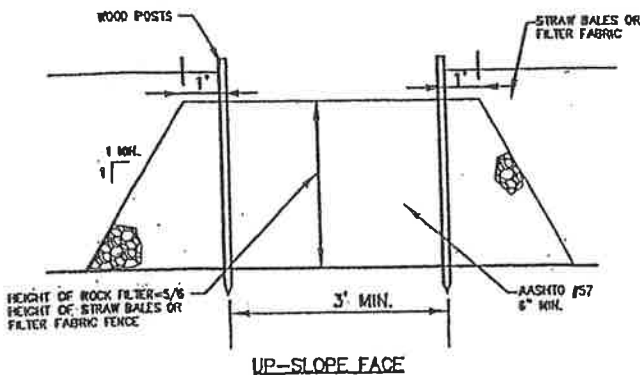


ROCK FILTER OUTLET DETAIL

SEDIMENT MUST BE REMOVED WHEN ACCUMULATIONS REACH 1/3 THE HEIGHT OF THE OUTLET

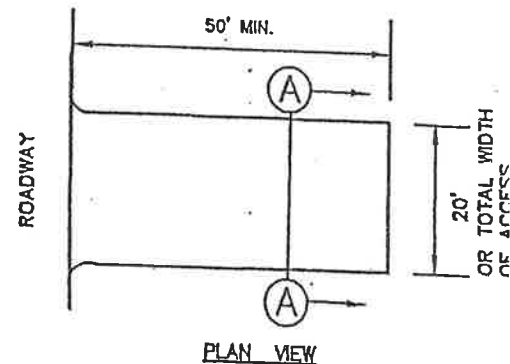

PLAN VIEW

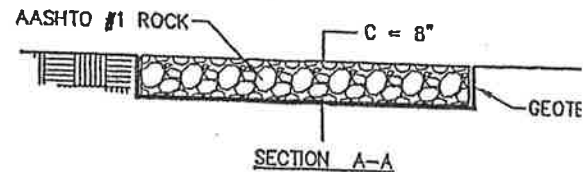

SECTION A-A

CONSTRUCTION ENTRANCE

MAINTENANCE: Rock Construction Entrance thickness shall be constant maintained to the specified dimensions by adding rock. A stockpile shall be maintained on site for this purpose. At the end of each construction day, all sediment deposited on paved roadways shall be removed and returned to the construction site.